
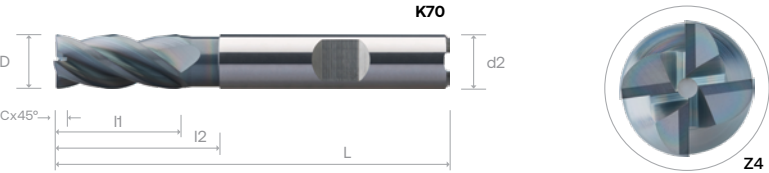


NITICO 30 DP/DH ENDMILLS, RECESS AND WELDON / WITH INTERNAL OIL HOLE, 4 FLUTES

- VHM NiTiCo 30 DP/DH Standard Fräser mit Innenkühlung, 4 Zähne
- Frese NiTiCo 30 con foro lubrificante interno, weldon e recesso, 4 taglienti
- Fraises NiTiCo 30 DP/DH av ec queue d'huile Weldon and dégagement - 4 dents
- 整体硬质合金 NiTiCo 30 DP/DH 系列 4刃平底铣刀(内冷孔、避空位和侧固柄)

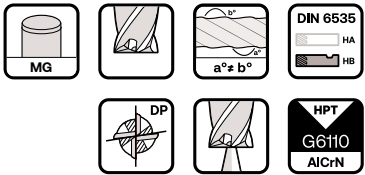

Order Number	Dimension (mm)							With Oil Hole
	D	I1	I2	L	d2 (H6)	C	G6H10	
K70 0400	4	11	15	57	6	0.1	°	•
K70 0500 *	5	13	18	57	6	0.1	°	•
K70 0600 *	6		19	57	6	0.1	°	•
K70 0800 *	8	20	26	64	8	0.2	°	•
K70 1000 *	10	22	30	72	10	0.2	°	•
K70 1200 *	12	26	36	83	12	0.2	°	•
K70 1400 *	14		36	83	14	0.3	°	•
K70 1600 *	16	32	42	92	16	0.3	°	•
K70 2000 *	20	38	52	104	20	0.4	°	•

* - DIN 6535

CNC Repeatability
Ø1 - Ø3 within 10µm
Ø4 - Ø8 within 15µm
≥ Ø10 within 20µm

Material Group | Material-Gruppe | Groupe Matiere | Gruppo Materiali | 材质主类

Cutting Parameter

N01	N02	N03	K01	K02	P01	P02	P03	M01	M02	S01	S02	S03	H01	H02	O01	O02	150 - 152
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----------