
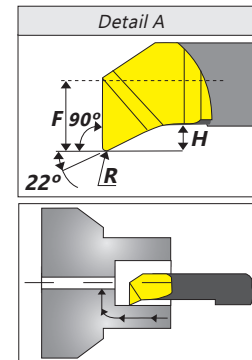


TTUR EINSÄTZE | Ø3.0 - 8.0mm

Profildrehen, 90° Plandrehen

TiAlN (K10 - K20) - Feinstkorn Hartmetall mit PVD-Mehrlagenbeschichtung

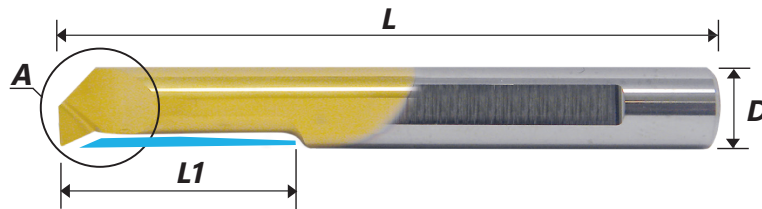

Artikelnummer	D	Länge in mm L1	Länge in mm L	R in mm	F	H	passender Halter	Min. Bohrungs-Ø	Brutto CHF
TTUR3-0.05R-10L	3.0	10	39	0.05	1.3	0.4	TTH20-3	3.1	27.00
TTUR3-0.05R-15L	3.0	15	39	0.05	1.3	0.4	TTH20-3	3.1	29.10
TTUR4-0.1R-10L	4.0	10	51	0.10	1.7	0.5	TTH20-4	4.1	27.40
TTUR4-0.1R-15L	4.0	15	51	0.10	1.7	0.5	TTH20-4	4.1	29.10
TTUR5-0.15R-15L	5.0	15	51	0.15	2.1	0.7	TTH20-5	5.1	27.40
TTUR5-0.15R-22L	5.0	22	51	0.15	2.1	0.7	TTH20-5	5.1	34.20
TTUR6-0.15R-15L	6.0	15	51	0.15	2.8	0.9	TTH20-6	6.1	27.40
TTUR6-0.15R-22L	6.0	22	51	0.15	2.8	0.9	TTH20-6	6.1	34.20
TTUR8-0.2R-22L	8.0	22	64	0.20	3.8	1.1	TTH20-8	8.1	40.60

Bemerkung: linke Ausführung auf Anfrage erhältlich