
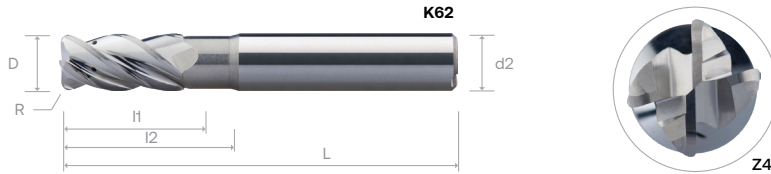


XQ ALU CUTTERS DP/DH/DF TORUS ENDMILLS, WITH RECESS, 4 FLUTES

- VHM XQ Alu Cutter DP/DH/DF Torusfräser, mit Innenkühlung, 4 Zähne
- Frese toroidali XQ Alu con passo differenziale, eliche a spoglie variabili, fori lubrificanti radiali, recesso, 4 taglienti
- Fraises XQ Alu toriques à pas décalés avec hélice différente, 4 dents
- 整体硬质合金 XQ Alu Cutters DP/DH/DF 4刃圆鼻铣刀(避空位和侧固柄)

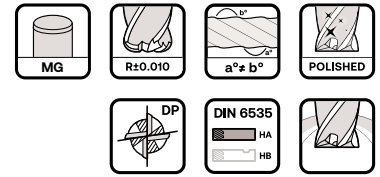

Order Number DIN 6535	Dimension (mm)						Flute Polished
	D	I1	I2	L	d2 (h6)	R	UC
K62 1000 072 1000 200 *	10	22	30	72	10	2	•
K62 1000 072 1000 250 *			30	72	10	2.5	◦
K62 1000 072 1000 300 *			30	72	10	3	•
K62 1000 072 1000 400 *			30	72	12	4	•
K62 1200 083 1200 200 *	12	26	36	83	12	2	•
K62 1200 083 1200 250 *			36	83	12	2.5	◦
K62 1200 083 1200 300 *			36	83	12	3	◦
K62 1200 083 1200 400 *			36	83	12	4	•
K62 1600 092 1600 200 *	16	32	42	92	16	2	•
K62 1600 092 1600 250 *			42	92	16	2.5	◦
K62 1600 092 1600 300 *			42	92	16	3	◦
K62 1600 092 1600 400 *			42	92	16	4	◦
K62 2000 104 2000 200 *	20	38	52	104	20	2	◦
K62 2000 104 2000 250 *			52	104	20	2.5	◦
K62 2000 104 2000 300 *			52	104	20	3	◦
K62 2000 104 2000 400 *			52	104	20	4	◦

* - DIN 6535

CNC Repeatability
Ø1 - Ø3 within 10µm
Ø4 - Ø8 within 15µm
≥ Ø10 within 20µm

Material Group | Material-Gruppe | Groupe Matière | Gruppo Materiali | 材质主类



Cutting Parameter

76 - 77

ALU LINE
 EZ LINE - ENDMILL
 SE 30
 NITICO 30
 OPTIMUM
 SE 45
 SE 45X
 NITICO 45
 SE 60
 SE 60X
 DN70 - SE 70
 SE GR
 TE 45
 PLUNGE -MILL
 THREAD MILL