


C16652

VHM-Spiralbohrer ohne Innenkühlung | 5xD
Schaft zylindrisch | TiAlN-Beschichtung

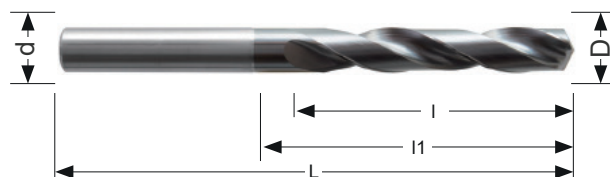

VHM

5xD

m7



140°

6335 HA



TiAlN

Werks
NORM**MENGENRABATT
AB 5 STK.****30%**

Artikel-Nr.	D	d	l	l1	L	CHF
C16652.0100	1	3	7.0	10.0	57.0	29.80
C16652.0110	1.1	3	10.0	12.0	57.0	29.80
C16652.0120	1.2	3	10.0	12.0	57.0	29.80
C16652.0130	1.3	3	10.0	12.0	57.0	29.80
C16652.0140	1.4	3	10.0	12.0	57.0	29.80
C16652.0150	1.5	3	10.0	12.0	57.0	29.80
C16652.0160	1.6	3	13.0	16.0	57.0	29.80
C16652.0170	1.7	3	13.0	16.0	57.0	29.80
C16652.0180	1.8	3	13.0	16.0	57.0	29.80
C16652.0190	1.9	3	13.0	16.0	57.0	29.80
C16652.0200	2	3	16.0	21.0	57.0	29.80
C16652.0210	2.1	3	16.0	21.0	57.0	29.80
C16652.0220	2.2	3	16.0	21.0	57.0	29.80
C16652.0230	2.3	3	16.0	21.0	57.0	29.80
C16652.0240	2.4	3	16.0	21.0	57.0	29.80
C16652.0250	2.5	3	16.0	21.0	57.0	29.80
C16652.0260	2.6	3	19.0	21.0	57.0	29.80
C16652.0270	2.7	3	19.0	21.0	57.0	29.80
C16652.0280	2.8	3	19.0	21.0	57.0	29.80
C16652.0290	2.9	3	19.0	21.0	57.0	29.80
C16652.0300	3	6	23.0	28.0	67.0	30.20
C16652.0310	3.1	6	23.0	28.0	67.0	30.20
C16652.0320	3.2	6	23.0	28.0	67.0	30.20
C16652.0330	3.3	6	23.0	28.0	67.0	30.20
C16652.0340	3.4	6	23.0	28.0	67.0	30.20
C16652.0350	3.5	6	23.0	28.0	67.0	30.20
C16652.0360	3.6	6	23.0	28.0	67.0	30.20
C16652.0370	3.7	6	23.0	28.0	67.0	30.20
C16652.0380	3.8	6	29.0	36.0	75.0	30.20
C16652.0390	3.9	6	29.0	36.0	75.0	30.20
C16652.0400	4	6	29.0	36.0	75.0	30.20
C16652.0410	4.1	6	29.0	36.0	75.0	30.20
C16652.0420	4.2	6	29.0	36.0	75.0	30.20
C16652.0430	4.3	6	29.0	36.0	75.0	30.20
C16652.0440	4.4	6	29.0	36.0	75.0	30.20
C16652.0450	4.5	6	29.0	36.0	75.0	30.20
C16652.0460	4.6	6	29.0	36.0	75.0	30.20
C16652.0465	4.65	6	29.0	36.0	75.0	30.20
C16652.0470	4.7	6	29.0	36.0	75.0	30.20
C16652.0480	4.8	6	35.0	44.0	83.0	30.20
C16652.0490	4.9	6	35.0	44.0	83.0	30.20
C16652.0500	5	6	35.0	44.0	83.0	30.20
C16652.0510	5.1	6	35.0	44.0	83.0	30.20
C16652.0520	5.2	6	35.0	44.0	83.0	30.20
C16652.0530	5.3	6	35.0	44.0	83.0	30.20
C16652.0540	5.4	6	35.0	44.0	83.0	30.20

Artikel-Nr.	D	d	l	l1	L	CHF
C16652.0550	5.5	6	35.0	44.0	83.0	30.20
C16652.0555	5.55	6	35.0	44.0	83.0	30.20
C16652.0560	5.6	6	35.0	44.0	83.0	30.20
C16652.0570	5.7	6	35.0	44.0	83.0	30.20
C16652.0580	5.8	6	35.0	44.0	83.0	30.20
C16652.0590	5.9	6	35.0	44.0	83.0	30.20
C16652.0600	6	6	35.0	44.0	83.0	30.20
C16652.0610	6.1	8	43.0	53.0	91.0	44.80
C16652.0620	6.2	8	43.0	53.0	91.0	44.80
C16652.0630	6.3	8	43.0	53.0	91.0	44.80
C16652.0640	6.4	8	43.0	53.0	91.0	44.80
C16652.0650	6.5	8	43.0	53.0	91.0	44.80
C16652.0660	6.6	8	43.0	53.0	91.0	44.80
C16652.0670	6.7	8	43.0	53.0	91.0	44.80
C16652.0680	6.8	8	43.0	53.0	91.0	44.80
C16652.0690	6.9	8	43.0	53.0	91.0	44.80
C16652.0700	7	8	43.0	53.0	91.0	44.80
C16652.0710	7.1	8	43.0	53.0	91.0	44.80
C16652.0720	7.2	8	43.0	53.0	91.0	44.80
C16652.0730	7.3	8	43.0	53.0	91.0	44.80
C16652.0740	7.4	8	43.0	53.0	91.0	44.80
C16652.0750	7.5	8	43.0	53.0	91.0	44.80
C16652.0760	7.6	8	43.0	53.0	91.0	44.80
C16652.0770	7.7	8	43.0	53.0	91.0	44.80
C16652.0780	7.8	8	43.0	53.0	91.0	44.80
C16652.0790	7.9	8	43.0	53.0	91.0	44.80
C16652.0800	8	8	43.0	53.0	91.0	44.80
C16652.0810	8.1	10	49.0	61.0	104.0	53.20
C16652.0820	8.2	10	49.0	61.0	104.0	53.20
C16652.0830	8.3	10	49.0	61.0	104.0	53.20
C16652.0840	8.4	10	49.0	61.0	104.0	53.20
C16652.0850	8.5	10	49.0	61.0	104.0	53.20
C16652.0860	8.6	10	49.0	61.0	104.0	53.20
C16652.0870	8.7	10	49.0	61.0	104.0	53.20
C16652.0880	8.8	10	49.0	61.0	104.0	53.20
C16652.0890	8.9	10	49.0	61.0	104.0	53.20
C16652.0900	9	10	49.0	61.0	104.0	53.20
C16652.0910	9.1	10	49.0	61.0	104.0	53.20
C16652.0920	9.2	10	49.0	61.0	104.0	53.20
C16652.0930	9.3	10	49.0	61.0	104.0	53.20
C16652.0940	9.4	10	49.0	61.0	104.0	53.20
C16652.0950	9.5	10	49.0	61.0	104.0	53.20
C16652.0960	9.6	10	49.0	61.0	104.0	53.20
C16652.0970	9.7	10	49.0	61.0	104.0	53.20
C16652.0980	9.8	10	49.0	61.0	104.0	53.20
C16652.0990	9.9	10	49.0	61.0	104.0	53.20

Artikel-Nr.	D	d	l	l1	L	CHF
C16652.1000	10	10	49.0	61.0	104.0	53.20
C16652.1010	10.1	12	56.0	71.0	117.0	81.20
C16652.1020	10.2	12	56.0	71.0	117.0	81.20
C16652.1030	10.3	12	56.0	71.0	117.0	81.20
C16652.1040	10.4	12	56.0	71.0	117.0	81.20
C16652.1050	10.5	12	56.0	71.0	117.0	81.20
C16652.1060	10.6	12	56.0	71.0	117.0	81.20
C16652.1070	10.7	12	56.0	71.0	117.0	81.20
C16652.1080	10.8	12	56.0	71.0	117.0	81.20
C16652.1090	10.9	12	56.0	71.0	117.0	81.20
C16652.1100	11	12	56.0	71.0	117.0	81.20
C16652.1110	11.1	12	56.0	71.0	117.0	81.20
C16652.1120	11.2	12	56.0	71.0	117.0	81.20
C16652.1130	11.3	12	56.0	71.0	117.0	81.20
C16652.1140	11.4	12	56.0	71.0	117.0	81.20
C16652.1150	11.5	12	56.0	71.0	117.0	81.20
C16652.1160	11.6	12	56.0	71.0	117.0	81.20
C16652.1170	11.7	12	56.0	71.0	117.0	81.20
C16652.1180	11.8	12	56.0	71.0	117.0	81.20
C16652.1190	11.9	12	56.0	71.0	117.0	81.20
C16652.1200	12	12	56.0	71.0	117.0	81.20
C16652.1220	12.2	14	60.0	77.0	125.0	99.90
C16652.1230	12.3	14	60.0	77.0	125.0	99.90
C16652.1250	12.5	14	60.0	77.0	125.0	99.90
C16652.1280	12.8	14	60.0	77.0	125.0	99.90
C16652.1300	13	14	60.0	77.0	125.0	99.90
C16652.1350	13.5	14	60.0	77.0	125.0	99.90
C16652.1380	13.8	14	60.0	77.0	125.0	99.90
C16652.1400	14	14	60.0	77.0	125.0	99.90
C16652.1450	14.5	16	63.0	83.0	135.0	122.50
C16652.1480	14.8	16	63.0	83.0	135.0	122.50
C16652.1500	15	16	63.0	83.0	135.0	122.50
C16652.1550	15.5	16	63.0	83.0	135.0	122.50
C16652.1580	15.8	16	63.0	83.0	135.0	122.50
C16652.1600	16	16	63.0	83.0	135.0	122.50
C16652.1650	16.5	18	91.0	93.0	143.0	159.70
C16652.1680	16.8	18	91.0	93.0	143.0	159.70
C16652.1700	17	18	91.0	93.0	143.0	159.70
C16652.1750	17.5	18	91.0	93.0	143.0	159.70
C16652.1780	17.8	18	91.0	93.0	143.0	159.70
C16652.1800	18	18	91.0	93.0	143.0	159.70
C16652.1850	18.5	20	77.0	101.0	155.0	202.30
C16652.1900	19	20	77.0	101.0	155.0	202.30
C16652.1950	19.5	20	77.0	101.0	155.0	202.30
C16652.2000	20	20	77.0	101.0	153.0	202.30

	Stahl			Gehärtete Stähle			INOX			Guss	Titan	Super Leg. Fe/NiCo	Aluminium	Kupfer	Kunststoffe
Sehr gut geeignet	<700 N/mm ²	<1000 N/mm ²	<1400 N/mm ²	<55 HRC	<60 HRC	<65 HRC	ferritisch	austenitisch	duplex	GG	GGG	<30 HRC	>30 HRC	<8% Si	>8% Si
Gut geeignet	●	●	●				●		●	●	●	●	●	●	●