


C16742

VHM-Spiralbohrer mit Innenkühlung | 15xD,
Führungsfasen | Schaft zylindrisch | TiAlN-Beschichtung

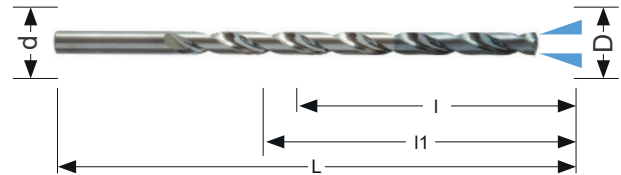

VHM

15xD

m7



6535 HA



Werks
NORM

**MENGENRABATT
AB 5 STK.**

30%

Artikel-Nr.	D	d	l	l1	L	CHF
C16742.0300	3	6	60.0	100.0		154.40
C16742.0350	3.5	6	60.0	100.0		154.40
C16742.0400	4	6	75.0	115.0		154.40
C16742.0450	4.5	6	75.0	115.0		165.90
C16742.0500	5	6	90.0	130.0		165.90
C16742.0550	5.5	6	108.0	150.0		165.90

Artikel-Nr.	D	d	l	l1	L	CHF
C16742.0600	6	6	108.0	150.0		165.90
C16742.0650	6.5	7	125.0	165.0		208.80
C16742.0700	7	7	125.0	165.0		240.90
C16742.0800	8	8	140.0	180.0		240.90
C16742.0850	8.5	9	160.0	205.0		313.50
C16742.0900	9	9	160.0	205.0		313.50

Artikel-Nr.	D	d	l	l1	L	CHF
C16742.1000	10	10	180.0	225.0		313.50
C16742.1200	12	12	215.0	265.0		389.40

	Stahl			Gehärtete Stähle			INOX			Guss	Titan	Super Leg. Fe/NiCo	Aluminium		Kupfer	Kunst- stoffe		
● Sehr gut geeignet	<700 N/mm ²	<1000 N/mm ²	<1400 N/mm ²	<55 HRC	<60 HRC	<65 HRC	ferritisch	austenitisch	duplex	GG	GGG		<30 HRC	>30 HRC	<8% Si	>8% Si	Cu-Leg.	
○ Gut geeignet	●	●	●				●		●	●	●						●	