


C16662

VHM-Spiralbohrer mit Innenkühlung | 8xD,
4 Führungsfasen | Schaft zylindrisch | TiAlN-Beschichtung

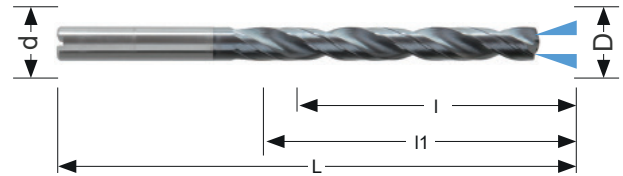

**MENGENRABATT
AB 5 STK.**

30%

Artikel-Nr.	D	d	l	l1	L	CHF
C16662.0100	1	3	9.0	11.0	55.0	46.20
C16662.0110	1.1	3	13.5	17.0	55.0	46.20
C16662.0120	1.2	3	13.5	17.0	55.0	46.20
C16662.0130	1.3	3	13.5	17.0	55.0	46.20
C16662.0140	1.4	3	13.5	17.0	55.0	46.20
C16662.0150	1.5	3	17.5	22.0	55.0	46.20
C16662.0160	1.6	3	17.5	22.0	55.0	46.20
C16662.0170	1.7	3	17.5	22.0	55.0	46.20
C16662.0180	1.8	3	17.5	22.0	55.0	46.20
C16662.0190	1.9	3	17.5	22.0	55.0	46.20
C16662.0200	2	3	22.5	28.0	74.0	46.20
C16662.0210	2.1	3	22.5	28.0	74.0	46.20
C16662.0220	2.2	3	22.5	28.0	74.0	46.20
C16662.0230	2.3	3	22.5	28.0	74.0	46.20
C16662.0240	2.4	3	22.5	28.0	74.0	46.20
C16662.0250	2.5	3	22.5	32.0	81.0	46.20
C16662.0260	2.6	3	22.5	32.0	81.0	46.20
C16662.0270	2.7	3	22.5	32.0	81.0	46.20
C16662.0280	2.8	3	22.5	32.0	81.0	46.20
C16662.0290	2.9	3	22.5	32.0	81.0	46.20
C16662.0300	3	6	27.0	34.0	72.0	64.70
C16662.0310	3.1	6	27.0	34.0	72.0	64.70
C16662.0320	3.2	6	27.0	34.0	72.0	64.70
C16662.0330	3.3	6	27.0	34.0	72.0	64.70
C16662.0340	3.4	6	27.0	34.0	72.0	64.70
C16662.0350	3.5	6	27.0	34.0	72.0	64.70
C16662.0360	3.6	6	27.0	34.0	72.0	64.70
C16662.0370	3.7	6	27.0	34.0	72.0	64.70
C16662.0380	3.8	6	35.0	43.0	86.0	64.70
C16662.0390	3.9	6	35.0	43.0	86.0	64.70
C16662.0400	4	6	35.0	43.0	86.0	64.70
C16662.0410	4.1	6	35.0	43.0	86.0	64.70
C16662.0420	4.2	6	35.0	43.0	86.0	64.70
C16662.0430	4.3	6	35.0	43.0	86.0	64.70
C16662.0440	4.4	6	35.0	43.0	86.0	64.70
C16662.0450	4.5	6	35.0	43.0	86.0	64.70
C16662.0460	4.6	6	35.0	43.0	86.0	64.70
C16662.0470	4.7	6	35.0	43.0	86.0	64.70
C16662.0480	4.8	6	45.0	57.0	95.0	73.90
C16662.0490	4.9	6	45.0	57.0	95.0	73.90

Artikel-Nr.	D	d	l	l1	L	CHF
C16662.0500	5	6	45.0	57.0	95.0	73.90
C16662.0510	5.1	6	45.0	57.0	95.0	73.90
C16662.0520	5.2	6	45.0	57.0	95.0	73.90
C16662.0530	5.3	6	45.0	57.0	95.0	73.90
C16662.0540	5.4	6	45.0	57.0	95.0	73.90
C16662.0550	5.5	6	45.0	57.0	95.0	73.90
C16662.0560	5.6	6	45.0	57.0	95.0	73.90
C16662.0570	5.7	6	45.0	57.0	95.0	73.90
C16662.0580	5.8	6	45.0	57.0	95.0	73.90
C16662.0590	5.9	6	45.0	57.0	95.0	73.90
C16662.0600	6	6	45.0	57.0	95.0	73.90
C16662.0610	6.1	8	52.0	76.0	114.0	104.70
C16662.0620	6.2	8	52.0	76.0	114.0	104.70
C16662.0630	6.3	8	52.0	76.0	114.0	104.70
C16662.0640	6.4	8	52.0	76.0	114.0	104.70
C16662.0650	6.5	8	52.0	76.0	114.0	104.70
C16662.0660	6.6	8	52.0	76.0	114.0	104.70
C16662.0670	6.7	8	52.0	76.0	114.0	104.70
C16662.0680	6.8	8	52.0	76.0	114.0	104.70
C16662.0690	6.9	8	52.0	76.0	114.0	104.70
C16662.0700	7	8	60.0	76.0	114.0	104.70
C16662.0710	7.1	8	60.0	76.0	114.0	104.70
C16662.0720	7.2	8	60.0	76.0	114.0	104.70
C16662.0730	7.3	8	60.0	76.0	114.0	104.70
C16662.0740	7.4	8	60.0	76.0	114.0	104.70
C16662.0750	7.5	8	60.0	76.0	114.0	104.70
C16662.0760	7.6	8	60.0	76.0	114.0	104.70
C16662.0770	7.7	8	60.0	76.0	114.0	104.70
C16662.0780	7.8	8	60.0	76.0	114.0	104.70
C16662.0790	7.9	8	60.0	76.0	114.0	104.70
C16662.0800	8	8	60.0	76.0	114.0	104.70
C16662.0810	8.1	10	68.0	95.0	142.0	129.40
C16662.0820	8.2	10	68.0	95.0	142.0	129.40
C16662.0830	8.3	10	68.0	95.0	142.0	129.40
C16662.0840	8.4	10	68.0	95.0	142.0	129.40
C16662.0850	8.5	10	68.0	95.0	142.0	129.40
C16662.0860	8.6	10	68.0	95.0	142.0	129.40
C16662.0870	8.7	10	68.0	95.0	142.0	129.40
C16662.0880	8.8	10	68.0	95.0	142.0	129.40
C16662.0890	8.9	10	68.0	95.0	142.0	129.40

Artikel-Nr.	D	d	l	l1	L	CHF
C16662.0900	9	10	68.0	95.0	142.0	129.40
C16662.0910	9.1	10	76.0	95.0	142.0	129.40
C16662.0920	9.2	10	76.0	95.0	142.0	129.40
C16662.0930	9.3	10	76.0	95.0	142.0	129.40
C16662.0940	9.4	10	76.0	95.0	142.0	129.40
C16662.0950	9.5	10	76.0	95.0	142.0	129.40
C16662.0960	9.6	10	76.0	95.0	142.0	129.40
C16662.0970	9.7	10	76.0	95.0	142.0	129.40
C16662.0980	9.8	10	76.0	95.0	142.0	129.40
C16662.0990	9.9	10	76.0	95.0	142.0	129.40
C16662.1000	10	10	76.0	95.0	142.0	129.40
C16662.1010	10.1	12	90.0	114.0	162.0	184.80
C16662.1020	10.2	12	90.0	114.0	162.0	184.80
C16662.1030	10.3	12	90.0	114.0	162.0	184.80
C16662.1040	10.4	12	90.0	114.0	162.0	184.80
C16662.1050	10.5	12	90.0	114.0	162.0	184.80
C16662.1060	10.6	12	90.0	114.0	162.0	184.80
C16662.1070	10.7	12	90.0	114.0	162.0	184.80
C16662.1080	10.8	12	90.0	114.0	162.0	184.80
C16662.1090	10.9	12	90.0	114.0	162.0	184.80
C16662.1100	11	12	90.0	114.0	162.0	184.80
C16662.1110	11.1	12	90.0	114.0	162.0	184.80
C16662.1120	11.2	12	90.0	114.0	162.0	184.80
C16662.1130	11.3	12	90.0	114.0	162.0	184.80
C16662.1140	11.4	12	90.0	114.0	162.0	184.80
C16662.1150	11.5	12	90.0	114.0	162.0	184.80
C16662.1160	11.6	12	90.0	114.0	162.0	184.80
C16662.1170	11.7	12	90.0	114.0	162.0	184.80
C16662.1180	11.8	12	90.0	114.0	162.0	184.80
C16662.1190	11.9	12	90.0	114.0	162.0	184.80
C16662.1200	12	12	90.0	114.0	162.0	184.80
C16662.1250	12.5	14	106.0	133.0	184.0	280.30
C16662.1280	12.8	14	106.0	133.0	184.0	280.30
C16662.1300	13	14	106.0	133.0	184.0	280.30
C16662.1350	13.5	14	106.0	133.0	184.0	280.30
C16662.1400	14	14	106.0	133.0	184.0	280.30
C16662.1450	14.5	16	122.0	152.0	203.0	372.70
C16662.1500	15	16	122.0	152.0	203.0	372.70
C16662.1550	15.5	16	122.0	152.0	203.0	372.70
C16662.1600	16	16	122.0	152.0	203.0	372.70

	Stahl			Gehärtete Stähle			INOX			Guss	Titan	Super Leg. Fe/NiCo	Aluminium	Kupfer	Kunst- stoffe	
	<700 N/mm ²	<1000 N/mm ²	<1400 N/mm ²	<55 HRC	<60 HRC	<65 HRC	ferritisch	austenitisch	duplex	GG	GGG	<30 HRC	>30 HRC	<8% Si	>8% Si	Cu-Leg.
Sehr gut geeignet	●	●	●				●		●	●	●			●	●	●
Gut geeignet																