


C16462

VHM-Spiralbohrer mit Innenkühlung | 3xD
Schaft zylindrisch | TiAlN-Beschichtung

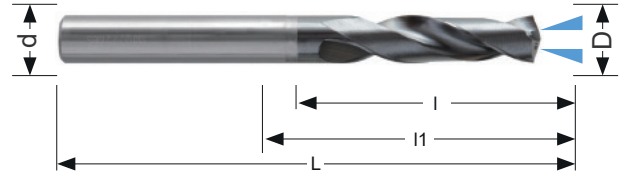

**MENGENRABATT
AB 5 STK.**

30%



Artikel-Nr.	D	d	l	l1	L	CHF
C16462.0300	3	6	14.0	20.0	63.0	42.10
C16462.0310	3.1	6	14.0	20.0	63.0	42.10
C16462.0320	3.2	6	14.0	20.0	63.0	42.10
C16462.0330	3.3	6	14.0	20.0	63.0	42.10
C16462.0340	3.4	6	14.0	20.0	63.0	42.10
C16462.0350	3.5	6	14.0	20.0	63.0	42.10
C16462.0360	3.6	6	14.0	20.0	63.0	42.10
C16462.0370	3.7	6	14.0	20.0	63.0	42.10
C16462.0380	3.8	6	17.0	24.0	67.0	42.10
C16462.0390	3.9	6	17.0	24.0	67.0	42.10
C16462.0400	4	6	17.0	24.0	67.0	42.10
C16462.0410	4.1	6	17.0	24.0	67.0	42.10
C16462.0420	4.2	6	17.0	24.0	67.0	42.10
C16462.0430	4.3	6	17.0	24.0	67.0	42.10
C16462.0440	4.4	6	17.0	24.0	67.0	42.10
C16462.0450	4.5	6	17.0	24.0	67.0	42.10
C16462.0460	4.6	6	17.0	24.0	67.0	42.10
C16462.0465	4.65	6	17.0	24.0	67.0	42.10
C16462.0470	4.7	6	17.0	24.0	67.0	42.10
C16462.0480	4.8	6	20.0	28.0	67.0	42.10
C16462.0490	4.9	6	20.0	28.0	67.0	42.10
C16462.0500	5	6	20.0	28.0	67.0	42.10
C16462.0510	5.1	6	20.0	28.0	67.0	42.10
C16462.0520	5.2	6	20.0	28.0	67.0	42.10
C16462.0530	5.3	6	20.0	28.0	67.0	42.10
C16462.0540	5.4	6	20.0	28.0	67.0	42.10
C16462.0550	5.5	6	20.0	28.0	67.0	42.10
C16462.0555	5.55	6	20.0	28.0	67.0	42.10
C16462.0560	5.6	6	20.0	28.0	67.0	42.10
C16462.0570	5.7	6	20.0	28.0	67.0	42.10
C16462.0580	5.8	6	20.0	28.0	67.0	42.10
C16462.0590	5.9	6	20.0	28.0	67.0	42.10
C16462.0600	6	6	24.0	34.0	80.5	54.60
C16462.0610	6.1	8	24.0	34.0	80.5	54.60
C16462.0620	6.2	8	24.0	34.0	80.5	54.60
C16462.0630	6.3	8	24.0	34.0	80.5	54.60
C16462.0640	6.4	8	24.0	34.0	80.5	54.60
C16462.0650	6.5	8	24.0	34.0	80.5	54.60
C16462.0660	6.6	8	24.0	34.0	80.5	54.60

Artikel-Nr.	D	d	l	l1	L	CHF
C16462.0670	6.7	8	24.0	34.0	80.5	54.60
C16462.0680	6.8	8	24.0	34.0	80.5	54.60
C16462.0690	6.9	8	24.0	34.0	80.5	54.60
C16462.0700	7	8	24.0	34.0	80.5	54.60
C16462.0710	7.1	8	29.0	41.0	80.5	54.60
C16462.0720	7.2	8	29.0	41.0	80.5	54.60
C16462.0730	7.3	8	29.0	41.0	80.5	54.60
C16462.0740	7.4	8	29.0	41.0	80.5	54.60
C16462.0750	7.5	8	29.0	41.0	80.5	54.60
C16462.0760	7.6	8	29.0	41.0	80.5	54.60
C16462.0770	7.7	8	29.0	41.0	80.5	54.60
C16462.0780	7.8	8	29.0	41.0	80.5	54.60
C16462.0790	7.9	8	29.0	41.0	80.5	54.60
C16462.0800	8	8	29.0	41.0	80.5	54.60
C16462.0810	8.1	10	35.0	47.0	90.5	63.90
C16462.0820	8.2	10	35.0	47.0	90.5	63.90
C16462.0830	8.3	10	35.0	47.0	90.5	63.90
C16462.0840	8.4	10	35.0	47.0	89.0	63.90
C16462.0850	8.5	10	35.0	47.0	90.5	63.90
C16462.0860	8.6	10	35.0	47.0	90.5	63.90
C16462.0870	8.7	10	35.0	47.0	90.5	63.90
C16462.0880	8.8	10	35.0	47.0	90.5	63.90
C16462.0890	8.9	10	35.0	47.0	90.5	63.90
C16462.0900	9	10	35.0	47.0	90.5	63.90
C16462.0910	9.1	10	35.0	47.0	90.5	63.90
C16462.0920	9.2	10	35.0	47.0	90.5	63.90
C16462.0930	9.3	10	35.0	47.0	90.5	63.90
C16462.0940	9.4	10	35.0	47.0	90.5	63.90
C16462.0950	9.5	10	35.0	47.0	90.5	63.90
C16462.0960	9.6	10	35.0	47.0	90.5	63.90
C16462.0970	9.7	10	35.0	47.0	90.5	63.90
C16462.0980	9.8	10	35.0	47.0	90.5	63.90
C16462.0990	9.9	10	35.0	47.0	90.5	63.90
C16462.1000	10	10	35.0	47.0	90.5	63.90
C16462.1010	10.1	12	40.0	55.0	104.0	90.50
C16462.1020	10.2	12	40.0	55.0	104.0	90.50
C16462.1030	10.3	12	40.0	55.0	104.0	90.50
C16462.1040	10.4	12	40.0	55.0	104.0	90.50
C16462.1050	10.5	12	40.0	55.0	104.0	90.50

Artikel-Nr.	D	d	l	l1	L	CHF
C16462.1060	10.6	12	40.0	55.0	104.0	90.50
C16462.1070	10.7	12	40.0	55.0	104.0	90.50
C16462.1080	10.8	12	40.0	55.0	104.0	90.50
C16462.1090	10.9	12	40.0	55.0	104.0	90.50
C16462.1100	11	12	40.0	55.0	104.0	90.50
C16462.1110	11.1	12	40.0	55.0	104.0	90.50
C16462.1120	11.2	12	40.0	55.0	104.0	90.50
C16462.1130	11.3	12	40.0	55.0	104.0	90.50
C16462.1140	11.4	12	40.0	55.0	104.0	90.50
C16462.1150	11.5	12	40.0	55.0	104.0	90.50
C16462.1160	11.6	12	40.0	55.0	104.0	90.50
C16462.1170	11.7	12	40.0	55.0	104.0	90.50
C16462.1180	11.8	12	40.0	55.0	104.0	90.50
C16462.1190	11.9	12	40.0	55.0	104.0	90.50
C16462.1200	12	12	40.0	55.0	104.0	90.50
C16462.1230	12.3	14	43.0	60.0	109.0	118.50
C16462.1250	12.5	14	43.0	60.0	109.0	118.50
C16462.1280	12.8	14	43.0	60.0	109.0	118.50
C16462.1300	13	14	43.0	60.0	109.0	118.50
C16462.1350	13.5	14	43.0	60.0	109.0	118.50
C16462.1380	13.8	14	43.0	60.0	109.0	118.50
C16462.1400	14	14	43.0	60.0	109.0	118.50
C16462.1450	14.5	16	45.0	65.0	117.5	146.40
C16462.1480	14.8	16	45.0	65.0	117.5	146.40
C16462.1500	15	16	45.0	65.0	117.5	146.40
C16462.1550	15.5	16	45.0	65.0	117.5	146.40
C16462.1580	15.8	16	45.0	65.0	117.5	146.40
C16462.1600	16	16	45.0	65.0	117.5	146.40
C16462.1650	16.5	18	51.0	79.0	125.5	206.30
C16462.1680	16.8	18	51.0	79.0	125.5	206.30
C16462.1700	17	18	51.0	79.0	125.5	206.30
C16462.1750	17.5	18	51.0	79.0	125.5	206.30
C16462.1780	17.8	18	51.0	79.0	125.5	206.30
C16462.1800	18	18	51.0	79.0	125.5	206.30
C16462.1850	18.5	20	55.0	79.0	134.0	259.50
C16462.1900	19	20	55.0	79.0	134.0	259.50
C16462.1950	19.5	20	55.0	79.0	134.0	259.50
C16462.1980	19.8	20	55.0	79.0	134.0	259.50
C16462.2000	20	20	55.0	79.0	134.0	259.50

	Stahl			Gehärtete Stähle			INOX			Guss	Titan	Super Leg. Fe/NiCo	Aluminium	Kupfer	Kunst- stoffe	
Sehr gut geeignet	<700 N/mm ²	<1000 N/mm ²	<1400 N/mm ²	<55 HRC	<60 HRC	<65 HRC	ferritisch	austenitisch	duplex	GG	GGG	<30 HRC	>30 HRC	<8% Si	>8% Si	Cu-Leg.
Gut geeignet	●	●	●				●		●	●	●			●	●	●